




**PAS I 6AP M10 V2A (472 209)**



Figure without obligation

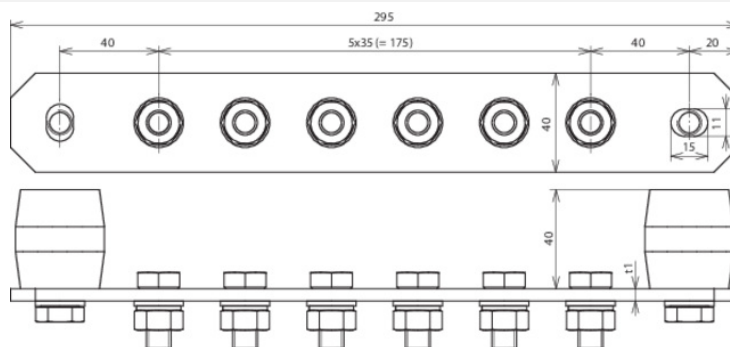

Arrangement:

Type	PAS I 6AP M10 V2A
Part No.	472 209
Number of terminals	6
Material	StSt
Material No.	1.4301 / 1.4303
Dimensions (l x w x d1)	295 x 40 x 6 mm
Cross-section	240 mm <sup>2</sup>
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	8.9 kA
Screw	M10 x 25 mm
Material of screw / nut	StSt
Design	with spring washer
Material of insulator	UP
Colour of insulator	red
Lightning current carrying capability (10/350 µs)	100 kA <sup>*)</sup>
Standard	EN 62561-1
Weight	1,01 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364090934
PU	1 pc(s)

<sup>\*)</sup> For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Special designs available on request.